


Three-terminal positive voltage regulator

FEATURES

- Maximum Output Current I_O : 0.1 A
- Output Voltage V_O : -15 V
- Continuous Total Dissipation PD : 0.6 W ($T_a = 25^\circ C$)

MECHANICAL DATA

- Case: SOT-89 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

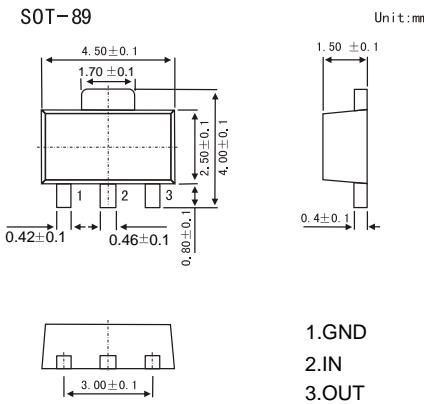

ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)


Parameter	Symbol	Value	Unit
Input Voltage	V_i	-30	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	208.3	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-65~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i = -23V$, $I_o = 40mA$, $C_i = 0.33\mu F$, $C_o = 0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test condition	Min	Typ	Max	Unit	
Output voltage	V_o		25°C	-14.4		V	
		-17.5V ≤ V_i ≤ -30V, $I_o = 1mA \sim 40mA$	0-125°C	-14.25	-15	-15.75	V
		$I_o = 1mA \sim 70mA$		-14.25	-		V
Load Regulation	ΔV_o	$I_o = 1mA \sim 100mA$, $V_i = -23V$	25°C	25	150	mV	
		$I_o = 1mA \sim 40mA$, $V_i = -23V$	25°C	15	75	mV	
Line regulation	ΔV_o	-17.5V ≤ V_i ≤ -30V, $I_o = 40mA$	25°C	65	300	mV	
		-20V ≤ V_i ≤ -30V, $I_o = 40mA$	25°C	50	250	mV	
Quiescent Current	I_q		25°C		6.5	mA	
Quiescent Current Change	ΔI_q	-2 ≤ V_i ≤ -30V, $I_o = 40mA$	0-125°C		1.5	mA	
	ΔI_q	1 ≤ I_o ≤ 40mA	0-125°C		0.1	mA	
Output Noise Voltage	V_N	10Hz ≤ f ≤ 100KHz	25°C	90		µV/ V_o	
Ripple Rejection	RR	-18.5V ≤ V_i ≤ -28.5V, f = 120Hz	0-125°C	34	3	dB	
Dropout Voltage	V_d		25°C		1.7	V	

* Pulse test.

TYPICAL APPLICATION

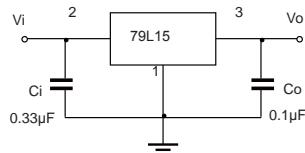

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

RATINGS AND CHARACTERISTIC CURVES

TYPICAL APPLICATION

