

## PHOTOVOLTAIC DIODE

VOLTAGE RANGE: 30--- 100 V CURRENT: 15.0 A


## FEATURES

- Metal of silicon rectifier
- majority carrier conduction
- Guard ring for transient protection
- Low power loss,high efficiency
- High current capability,low VF
- High surge capacity
- Plastic package has UL flammability classification 94V-0
- For use in low voltage,high frequency inverters,free wheeling, and polarity protection applications

## MECHANICAL DATA

- Case: R-6 molded plastic body
- Lead:Plated axial leads,solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any

R-6

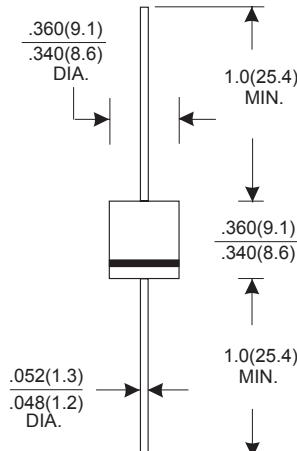

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted) Single phase,half wave,60 Hz,resistive or inductive load.

For capacitive load,derate by 20%.

CHARACTERISTICS	SYMBOL	15SQ030	15SQ035	15SQ040	15SQ045	15SQ050	15SQ060	15SQ080	15SQ100	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	30	35	40	45	50	60	80	100	V
Maximum RMS Voltage	V <sub>RMS</sub>	21	24.5	28	31.5	35	42	56	70	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	30	35	40	45	50	60	80	100	V
Maximum Average Forward Rectified Current @T <sub>c</sub> =95 °C	I <sub>(AV)</sub>						15			A
Peak Forward Surge Current 8.3ms single half sine-wave super imposed on rated load(JEDEC Method)	I <sub>FSM</sub>						275			A
Peak Forward Voltage at 15A DC(Note1)	V <sub>F</sub>		0.55			0.7		0.8		V
Maximum DC Reverse Current @T <sub>j</sub> =25°C at Rated DC Bolcking Voltage @T <sub>j</sub> =125°C	I <sub>R</sub>				0.1					mA
					50					
Typical Junction Capacitance (Note2)	C <sub>J</sub>				450					pF
Typical Thermal Resistance (Note2)	R <sub>θJC</sub>				3					°C/W
Junction temperature Range in DC forward mode	T <sub>J</sub>			-55 to+175						°C
				200						
Storage Temperature Range	T <sub>S</sub>			-55 to+175						°C
ESD	V <sub>ESD</sub>				15000					V

NOTES:1.300us Pulse Width, 2%Duty Cycle.

2.Measured at 1.0 MHZ and applied reverse voltage of 4.0VDC.



3.Thermal Resistance Junction to case.




# RATINGS AND CHARACTERISTIC CURVES

**FIG.1-FORWARD CURRENT DERATING CURVE**


**FIG.2-MAXIMUM NON-REPETITIVE SURGE**

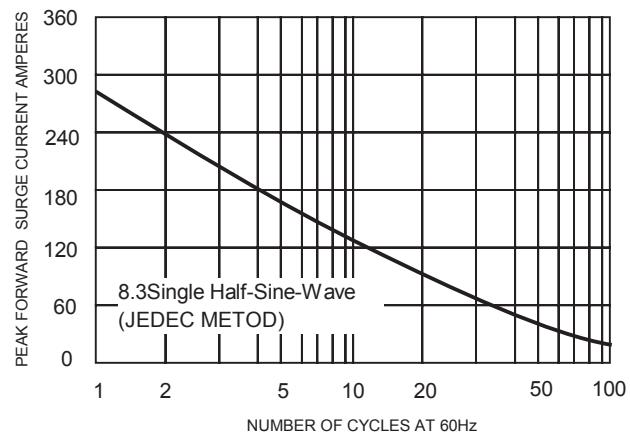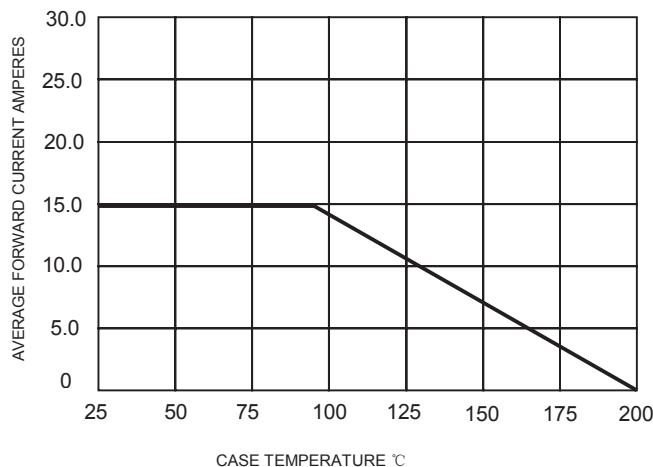

**FIG.3-TYPICAL REVERSE CHARACTERISTICS**

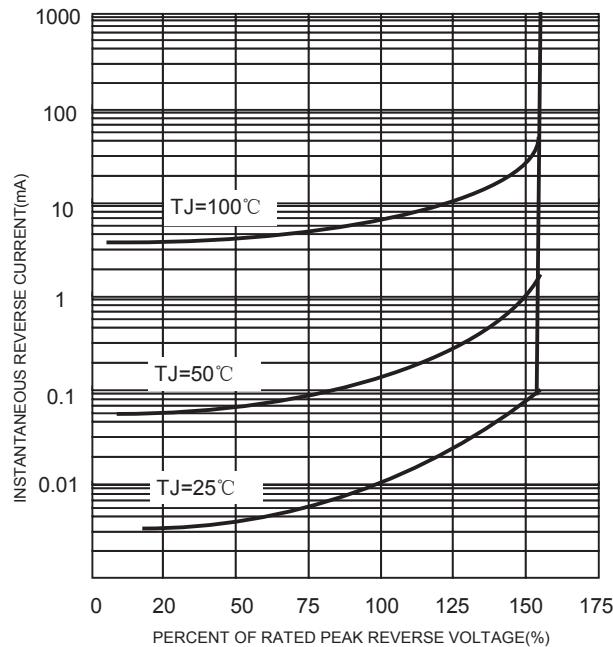

**FIG.4-TYPICAL FORWARD CHARACTERISTICS**

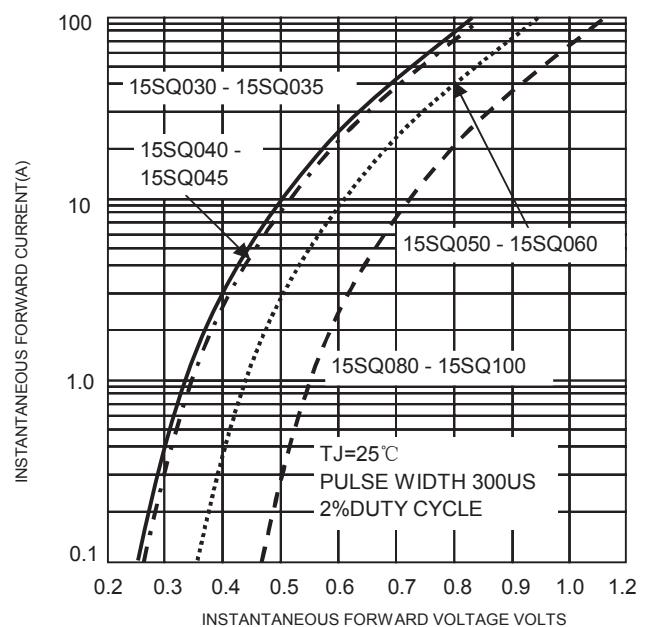

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

