


## TO-92 Plastic-Encapsulate Transistors

### FEATURES

- Switching and amplification in high voltage
- Applications such as telephony
- Low current
- High voltage
- NPN Transistors

### MECHANICAL DATA

- Case style: TO-92 molded plastic
- Mounting position: any

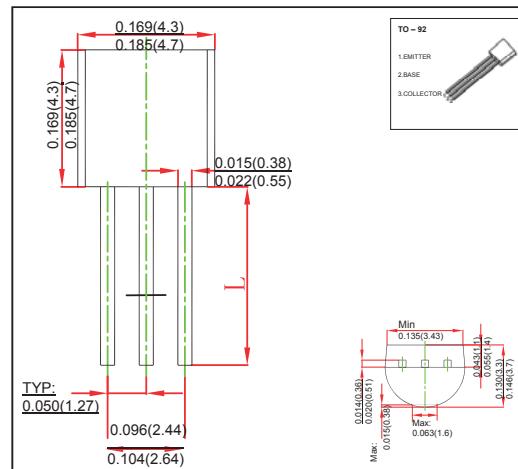

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	$V_{CBO}$	60	V
Collector-Emitter Voltage	$V_{CEO}$	40	V
Emitter-Base Voltage	$V_{EBO}$	6	V
Collector Current -Continuous	$I_C$	600	mA
Collector Power dissipation	$P_C$	0.625	W
Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{stg}$	-55 ~ +150	°C
Thermal Resistance, junction to Ambient	$R_{QJA}$	357	°C/mW

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	60		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=1 \text{ mA}, I_B=0$	40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	6		V
Collector cut-off current	$I_{CBO}$	$V_{CB}=35V, I_E=0$		0.1	$\mu A$
Emitter cut-off current	$I_{EBO}$	$V_{EB}=5V, I_C=0$		0.1	$\mu A$
DC current gain	$h_{FE(1)}$	$V_{CE}=1V, I_C=0.1mA$	20		
	$h_{FE(2)}$	$V_{CE}=1V, I_C=1mA$	40		
	$h_{FE(3)}$	$V_{CE}=1V, I_C= 10mA$	80		
	$h_{FE(4)}$	$V_{CE}=1V, I_C=150mA$	100	300	
	$h_{FE(5)}$	$V_{CE}=2V, I_C= 500mA$	40		
Collector-emitter saturation voltage	$V_{CE(sat)1}$	$I_C=150 \text{ mA}, I_B=15mA$		0.4	V
	$V_{CE(sat)2}$	$I_C=500 \text{ mA}, I_B=50mA$		0.75	V
Base-emitter saturation voltage	$V_{BE(sat)1}$	$I_C=150 \text{ mA}, I_B=15mA$		0.95	V
	$V_{BE(sat)2}$	$I_C=500 \text{ mA}, I_B=50mA$		1.2	V
Transition frequency	$f_T$	$V_{CE}= 10V, I_C= 20mA, f=100MHz$	250		MHz
Output Capacitance	$C_{ob}$	$V_{CB}=10V, I_E= 0, f=100KHz$		6.5	pF
Delay time	$t_d$	$V_{CC}=30V, V_{BE(OFF)}=2V$ $I_C=150mA, I_B1=15mA$		15	ns
Rise time	$t_r$			20	ns
Storage time	$t_s$	$V_{CC}=30V, I_C=150mA$ $I_{B1}=-I_{B2}= 15mA$		225	ns
Fall time	$t_f$			30	ns

## RATINGS AND CHARACTERISTIC CURVES

