

## Three-terminal positive voltage regulator

### FEATURES

- Maximum output current I<sub>OM</sub>: 0.5 A

- Output voltage V<sub>O</sub>: 5V

- Continuous total dissipation

P<sub>D</sub>: 1.25 W ( T<sub>a</sub> = 25 °C )


### MECHANICAL DATA

- Case: TO-252 Small Outline Plastic Package

- Polarity: Color band denotes cathode end

- Mounting Position: Any

**TO-252**

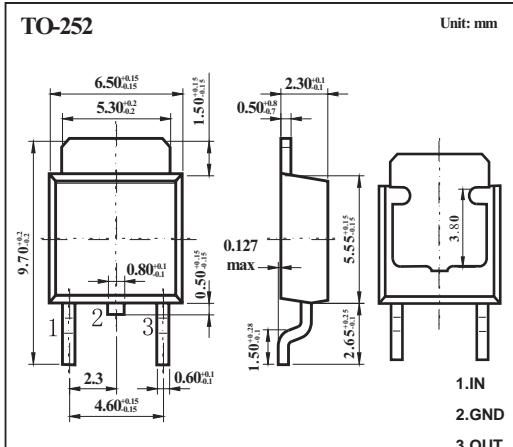

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Value	Unit
Input Voltage	V <sub>i</sub>	35	V
Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	80	°C/W
Operating Junction Temperature Range	T <sub>OPR</sub>	-25~+125	°C
Storage Temperature Range	T <sub>STG</sub>	-65~+150	°C


### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

(V<sub>i</sub>=10V, I<sub>O</sub>=350mA, C<sub>i</sub>=0.33μF, C<sub>O</sub>=0.1μF, unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit	
Output Voltage	V <sub>O</sub>	25°C	4.8	5	5.2	V	
		7V≤V <sub>i</sub> ≤20V, I <sub>O</sub> =5mA-350mA	-25~125°C	4.75	5	5.25	V
Load Regulation	ΔV <sub>O</sub>	I <sub>O</sub> =5mA-0.5A	25°C		15	mV	
		I <sub>O</sub> =5mA-200mA	25°C		5	mV	
Line Regulation	ΔV <sub>O</sub>	7V≤V <sub>i</sub> ≤25V, I <sub>O</sub> =200mA	25°C		3	mV	
		8V≤V <sub>i</sub> ≤25V, I <sub>O</sub> =200mA	25°C		1	50	mV
Quiescent Current	I <sub>Q</sub>		25°C		4.2	mA	
Quiescent Current Change	ΔI <sub>Q</sub>	8V≤V <sub>i</sub> ≤25V, I <sub>O</sub> =200mA	-25~125°C		0.8	mA	
	ΔI <sub>Q</sub>	5mA≤I <sub>O</sub> ≤350mA	-25~125°C		0.5	mA	
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100KHz	25°C		40	μV/V <sub>O</sub>	
Ripple Rejection	RR	8V≤V <sub>i</sub> ≤18V, f=120Hz, I <sub>O</sub> =300mA	-25~125°C	62	80	dB	
Dropout Voltage	V <sub>d</sub>	I <sub>O</sub> =350mA	25°C		2	2.5	V
Short Circuit Current	I <sub>SC</sub>	V <sub>i</sub> =10V	25°C		300		mA
Peak Current	I <sub>PK</sub>		25°C		0.5		A

\* Pulse test.

### TYPICAL APPLICATION



Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

# RATINGS AND CHARACTERISTIC CURVES

## Typical Characteristics

