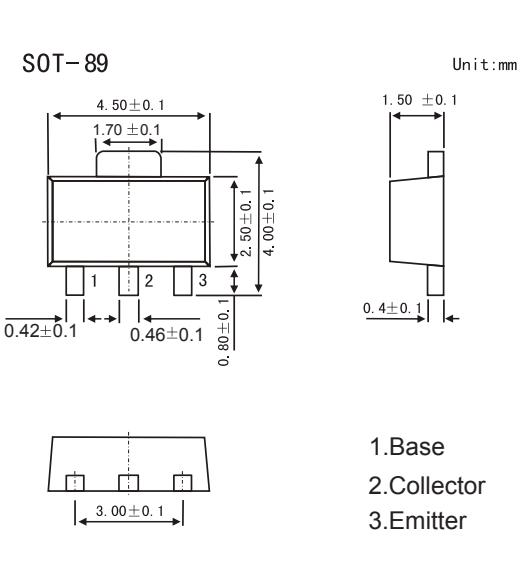


**SOT-89 Plastic-Encapsulate Transistors**
**Features**

- Small Flat Package
- General Purpose Application
- NPN Transistors

**MECHANICAL DATA**

- Case style:SOT-89molded plastic
- Mounting position:any


**MAXIMUM RATINGS AND CHARACTERISTICS**

@ 25°C Ambient Temperature (unless otherwise noted)

| Parameter                                   | Symbol            | Rating     | Unit |
|---|-------------------|------------|------|
| Collector - Base Voltage                    | V <sub>CBO</sub>  | 100        | V    |
| Collector - Emitter Voltage                 | V <sub>C EO</sub> | 80         |      |
| Emitter - Base Voltage                      | V <sub>EBO</sub>  | 5          |      |
| Collector Current - Continuous              | I <sub>c</sub>    | 1          |      |
| Collector Power Dissipation                 | P <sub>c</sub>    | 500        | mW   |
| Thermal Resistance From Junction To Ambient | R <sub>θJA</sub>  | 250        | °C/W |
| Junction Temperature                        | T <sub>J</sub>    | 150        | °C   |
| Storage Temperature Range                   | T <sub>stg</sub>  | -55 to 150 |      |

**PACKAGE INFORMATION**

| Device  | Package | Shipping       |
|---------|---------|----------------|
| KTD1898 | SOT-89  | 1000/Tape&Reel |

| Parameter                            | Symbol                | Test Conditions  | Min | Typ | Max | Unit |
|--------------------------------------|-----------------------|--|-----|-----|-----|------|
| Collector- base breakdown voltage    | V <sub>CBO</sub>      | I <sub>c</sub> = 100 μA, I <sub>E</sub> = 0              | 100 |     |     | V    |
| Collector- emitter breakdown voltage | V <sub>C EO</sub>     | I <sub>c</sub> = 1 mA, I <sub>B</sub> = 0                | 80  |     |     |      |
| Emitter - base breakdown voltage     | V <sub>EBO</sub>      | I <sub>E</sub> = 100 μ A, I <sub>c</sub> = 0             | 5   |     |     |      |
| Collector-base cut-off current       | I <sub>CBO</sub>      | V <sub>CB</sub> = 80 V , I <sub>E</sub> = 0              |     |     | 1   |      |
| Emitter cut-off current              | I <sub>EBO</sub>      | V <sub>EB</sub> = 4V , I <sub>c</sub> =0                 |     |     | 1   | uA   |
| Collector-emitter saturation voltage | V <sub>C E(sat)</sub> | I <sub>c</sub> =500 mA, I <sub>B</sub> =20mA             |     |     | 0.4 | V    |
| Base - emitter saturation voltage    | V <sub>BE(sat)</sub>  | I <sub>c</sub> =500 mA, I <sub>B</sub> =20mA             |     |     | 1   |      |
| DC current gain                      | h <sub>FE</sub>       | V <sub>C E</sub> = 3V, I <sub>c</sub> = 500mA            | 70  |     | 400 |      |
| Collector output capacitance         | C <sub>ob</sub>       | V <sub>CB</sub> = 10V, I <sub>E</sub> = 0,f=1MHz         |     | 20  |     | pF   |
| Transition frequency                 | f <sub>T</sub>        | V <sub>C E</sub> = 10V, I <sub>c</sub> = 50mA , f=100MHz |     | 100 |     | MHz  |

**Classification of h<sub>FE</sub>**

| Type    | KTD1898-O | KTD1898-Y | KTD1898-G |
|---------|-----------|-----------|-----------|
| Range   | 70-140    | 120-240   | 200-400   |
| Marking | ZO        | ZY        | ZG        |