

TO-92 High Speed Switching Application


Features

- ESD rating: 1000V (HBM)
- Low On-Resistance: $R_{DS(on)} < 3\Omega$ @ $V_{GS} = 10V$
- High power and current handling capability
- Very fast switching
- N-Channel Enhancement Mode MOSFET
- High speed line driver

MECHANICAL DATA

- Case style: TO-92 molded plastic
- Mounting position: any

TO-92

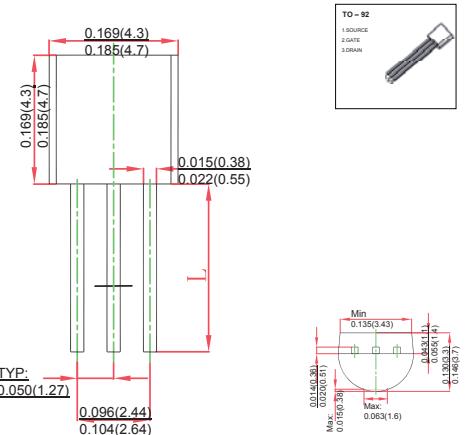

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Characteristic	Symbol	Ratings	Unit
Drain-Source voltage	V_{DS}	60	V
Gate-Source voltage	V_{GS}	± 20	V
(Note 1) Maximum drain current	I_D	500	mA
(Note 1) Pulsed drain current	I_{DP}	2	A
(Note 2) Power dissipation	P_D	625	mW
Operating junction temperature	T_j	150	°C
Storage temperature range	T_{STG}	-55~150	°C
(Note 2) Thermal resistance junction to ambient	$R_{th(j-a)}$	400	°C/W

Note 1) Limited only maximum junction temperature

Note 2) Device mounted on FR-4 board with recommended pad layout.

Electrical Specification (@ $T_A=25$ unless otherwise specified)

Characteristic	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Drain-Source breakdown voltage	BV_{DSS}	$I_D=250\mu A, V_{GS}=0$	60	-	-	V
Gate-Source breakdown voltage	BV_{GSS}	$I_G=250\mu A, V_{DS}=0$	± 20	-	-	V
Gate-Threshold voltage	$V_{GS(th)}$	$I_D=250\mu A, V_{DS}=V_{GS}$	1	-	2.5	V
Zero Gate voltage drain current	I_{DSs}	$V_{DS}=60V, V_{GS}=0$	-	-	1	μA
Gate-body leakage	I_{GSs}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 10	μA
(Note 3) Drain-Source on-resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=0.5A$	-	-	3	Ω
		$V_{GS}=5V, I_D=0.05A$	-	-	3.5	
(Note 3) Forward trans-conductance	g_{fs}	$V_{DS}=10V, I_D=0.2A$	0.08	-	-	S
Input capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0, f=1MHz$	-	30	50	pF
Output capacitance	C_{oss}		-	7	-	
Reverse Transfer capacitance	C_{rss}		-	4	-	
(Note 3, 4) Turn-on delay time	$t_{d(on)}$	$V_{DD}=30V, I_D=0.2A, V_{GS}=10V, R_G=10\Omega$	-	2	-	ns
(Note 3, 4) Rise time	t_r		-	15	-	
(Note 3, 4) Turn-off delay time	$t_{d(off)}$		--	8	-	
(Note 3, 4) Fall time	t_f		-	11	-	
(Note 3, 4) Total gate charge	Q_g	$V_{DS}=10V, I_D=0.25A, V_{GS}=4.5V$	-	0.6	0.8	nC
(Note 3, 4) Gate-Source charge	Q_{gs}		-	0.2	-	
(Note 3, 4) Gate-Drain charge	Q_{gd}		-	0.2	-	
(Note 3) Diode forward voltage	V_{SD}	$V_{GS}=0V, I_S=0.2A$	-	-	1.3	V

Note 3) Pulse test: Pulse width $\leq 300\mu s$, Duty cycle $\leq 2\%$

Note 4) Essentially independent of operating temperature typical characteristics.

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 $I_D - V_{DS}$

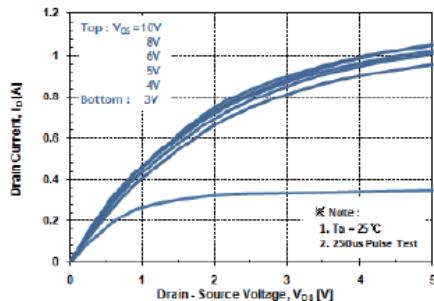


Fig. 2 $I_D - V_{GS}$

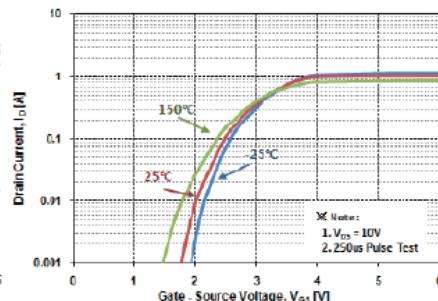


Fig. 3 $R_{DS(on)} - I_D$

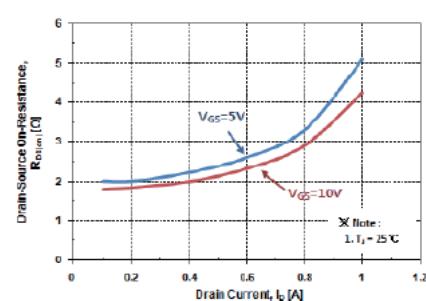


Fig. 4 $I_S - V_{SD}$

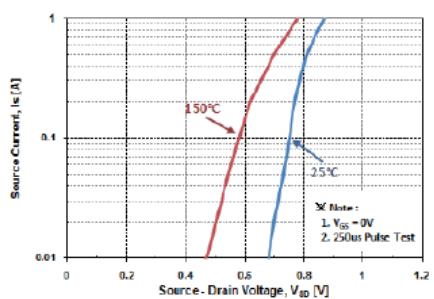


Fig. 5 Capacitance - V_{DS}

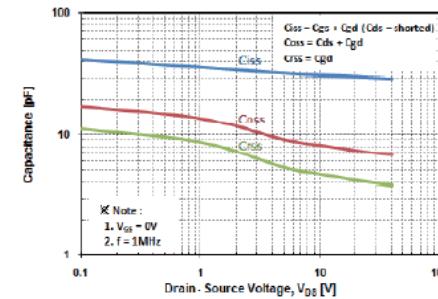


Fig. 6 $V_{GS} - Q_G$

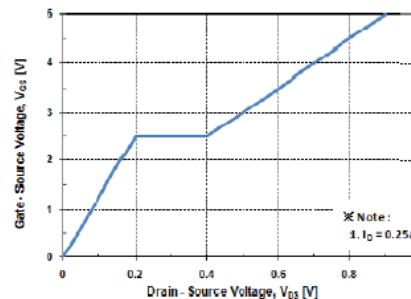


Fig. 7 $V_{DSS} - T_J$

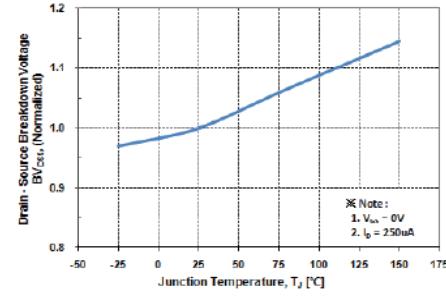


Fig. 8 $R_{DS(on)} - T_J$

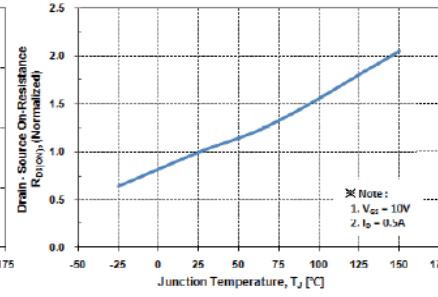


Fig. 9 $I_D - T_c$

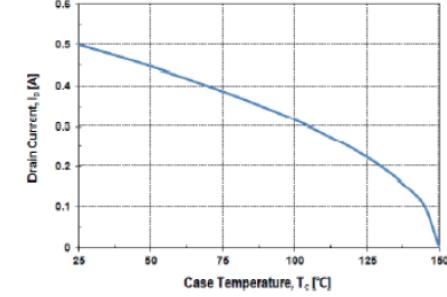


Fig. 10 Safe Operating Area

