

Three-terminal positive voltage regulator


FEATURES

- Maximum output current I_{OM} : 1.5 A
- Output voltage V_O : 9 V
- Continuous total dissipation

PD:1.5 W ($T_a = 25^\circ C$)

MECHANICAL DATA

- Case: TO-220L Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

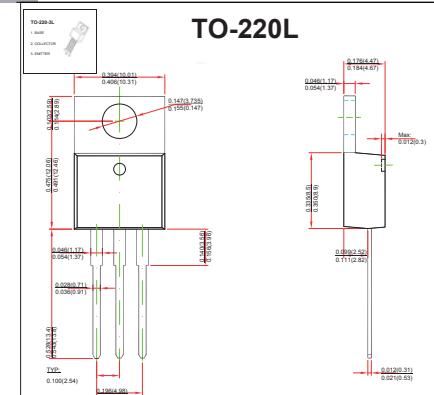

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Value	Unit
Input Voltage	V_i	35	V
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	83.3	°C/W
Thermal Resistance from Junction to Case	$R_{\theta JC}$	8.3	°C/W
Operating Junction Temperature Range	T_{OPR}	0~+150	°C
Storage Temperature Range	T_{STG}	-55~+150	°C

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

($V_i=16V$, $I_o=500mA$, $C_i=0.33\mu F$, $C_o=0.1\mu F$, unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V_o	25°C	8.65	9	9.35	V
		11.5V≤ V_i ≤24V, $I_o= 5mA-1A$, $P\leq 15W$	0-125°C	8.55	9	9.45
Load Regulation	ΔV_o	$I_o=5mA-1.5A$	25°C	12	180	mV
		$I_o=250mA-750mA$	25°C	4	90	mV
Line regulation	ΔV_o	11.5V≤ V_i ≤27V	25°C	7	180	mV
		13V≤ V_i ≤19V	25°C	2	90	mV
Quiescent Current	I_q		25°C	4.3	8	mA
Quiescent Current Change	ΔI_q	11.5V≤ V_i ≤27V	0-125°C		1	mA
		5mA≤ I_o ≤1A	0-125°C		0.5	mA
Output voltage drift	$\Delta V_o/\Delta T$	$I_o=5mA$	0-125°C	-1		mV/°C
Output Noise Voltage	V_N	10Hz≤f≤100KHz	25°C	60		uV
Ripple Rejection	RR	12V≤ V_i ≤22V, f=120Hz	0-125°C	55	70	dB
Dropout Voltage	V_d	$I_o=1A$	25°C	2		V
Output resistance	R_o	f=1KHz	25°C	18		mΩ
Short Circuit Current	I_{sc}		25°C	400		mA
Peak Current	I_{pk}		25°C	2.2		A

TYPICAL APPLICATION

