


## Three-terminal positive voltage regulator

### FEATURES

- Maximum output current I<sub>OM</sub>: 0.5A
- Output voltage V<sub>O</sub>: 12V
- Continuous total dissipation PD: 1.5W ( T<sub>a</sub> = 25 °C )

### MECHANICAL DATA

- Case: TO-220 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

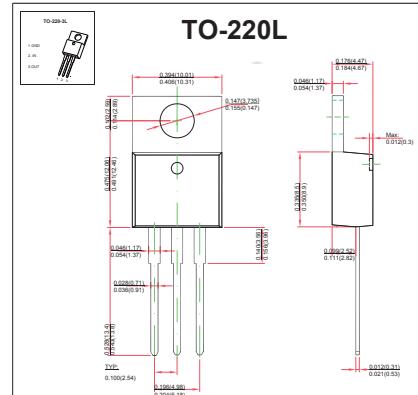

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)


| Parameter                                   | Symbol           | Value    | Unit |
|---|------------------|----------|------|
| Input Voltage                               | V <sub>i</sub>   | 35       | V    |
| Thermal Resistance from Junction to Ambient | R <sub>θJA</sub> | 66.7     | °C/W |
| Operating Junction Temperature Range        | T <sub>OPR</sub> | -25~+125 | °C   |
| Storage Temperature Range                   | T <sub>STG</sub> | -65~+150 | °C   |

### ELECTRICAL CHARACTERISTICS (V<sub>i</sub>=19V, I<sub>O</sub>=350mA, C<sub>i</sub>=0.33μF, C<sub>o</sub>=0.1μF, unless otherwise specified )

| Parameter                | Symbol          | Test conditions  | Min       | Typ  | Max | Unit |                   |
|--------------------------|-----------------|--|-----------|------|-----|------|-------------------|
| Output Voltage           | V <sub>O</sub>  |  | 25°C      | 11.5 | 12  | 12.5 | V                 |
|                          |                 | 14.5≤V <sub>i</sub> ≤27V, I <sub>O</sub> =5mA-350mA    | -25-125°C | 11.4 | 12  | 12.6 | V                 |
| Load Regulation          | ΔV <sub>O</sub> | I <sub>O</sub> =5mA-500mA                              | 25°C      |      | 25  | 240  | mV                |
|                          |                 | I <sub>O</sub> =5mA-200mA                              | 25°C      |      | 10  | 120  | mV                |
| Line Regulation          | ΔV <sub>O</sub> | 14.5V≤V <sub>i</sub> ≤30V, I <sub>O</sub> =200mA       | 25°C      |      | 10  | 100  | mV                |
|                          |                 | 16V≤V <sub>i</sub> ≤30V, I <sub>O</sub> =200mA         | 25°C      |      | 3   | 50   | mV                |
| Quiescent Current        | I <sub>Q</sub>  |  | 25°C      |      | 4.6 | 6    | mA                |
| Quiescent Current Change | ΔI <sub>Q</sub> | 14.5V≤V <sub>i</sub> ≤30V, I <sub>O</sub> =200mA       | -25-125°C |      |     | 0.8  | mA                |
|                          | ΔI <sub>Q</sub> | 5mA≤I <sub>O</sub> ≤350mA                              | -25-125°C |      |     | 0.5  | mA                |
| Output Noise Voltage     | V <sub>N</sub>  | 10Hz≤f≤100KHz  | 25°C      |      | 75  |      | μV/V <sub>O</sub> |
| Ripple Rejection         | RR              | 15≤V <sub>i</sub> ≤25V, f=120Hz, I <sub>O</sub> =300mA | -25-125°C | 55   | 80  |      | dB                |
| Dropout Voltage          | V <sub>d</sub>  | I <sub>O</sub> =350mA                                  | 25°C      |      | 2   |      | V                 |
| Short Circuit Current    | I <sub>SC</sub> | V <sub>i</sub> =19V                                    | 25°C      |      | 240 |      | mA                |
| Peak Current             | I <sub>PK</sub> |  | 25°C      |      | 0.7 |      | A                 |

\* Pulse test.

### TYPICAL APPLICATION

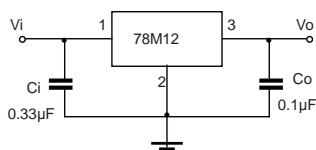


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.




# RATINGS AND CHARACTERISTIC CURVES

## TYPICAL APPLICATION


Output Characteristics

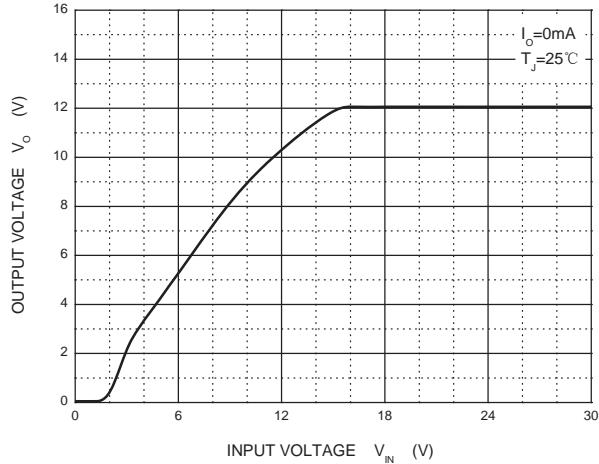


Dropout Characteristics

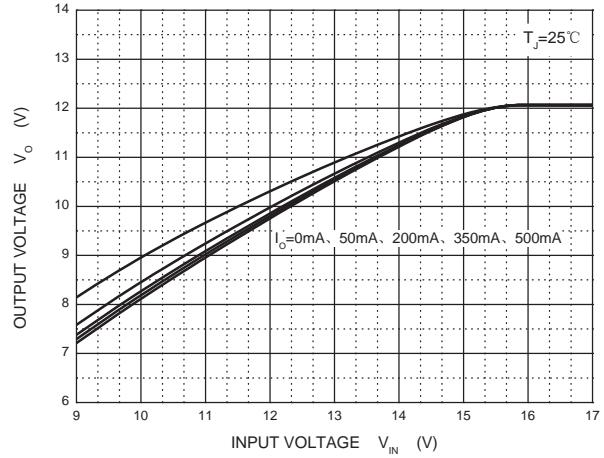


Quiescent Current vs Input Voltage

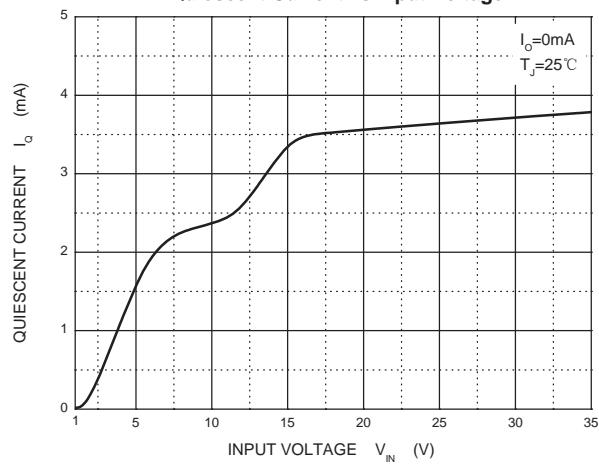

Current Cut-off Grid Voltage

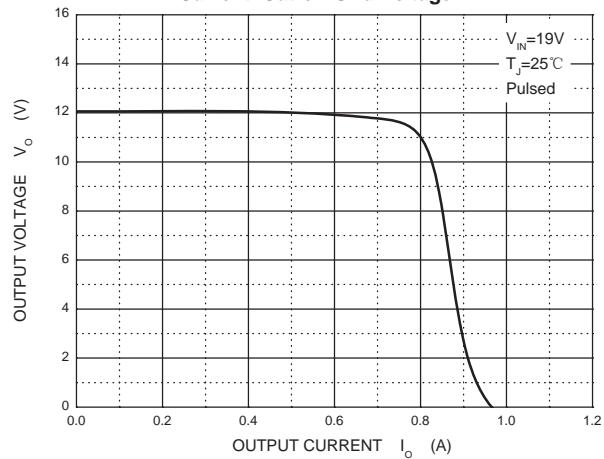

Output Voltage vs Junction Temperature

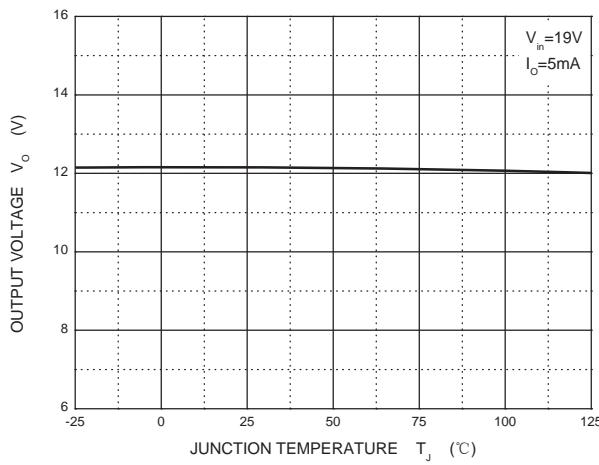

Power Derating Curve

