

## Three-terminal positive voltage regulator

### FEATURES

- Maximum output current I<sub>OM</sub>: 1.5 A

- Output voltage V<sub>O</sub>: -15V

- Continuous total dissipation


PD: 1.25 W ( T<sub>a</sub> = 25 °C )

### MECHANICAL DATA

- Case: TO-252 Small Outline Plastic Package

- Polarity: Color band denotes cathode end

- Mounting Position: Any

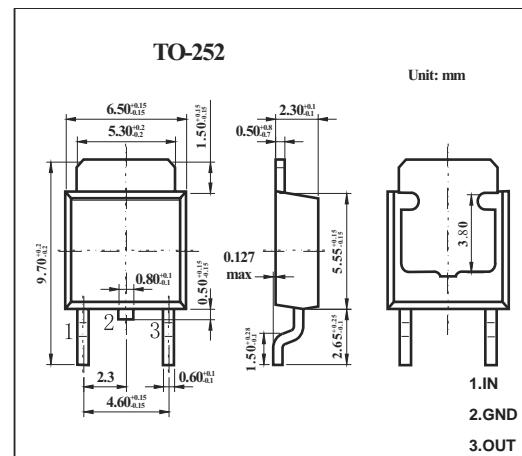

### ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

| Parameter                            | Symbol           | Value    | Unit |
|--------------------------------------|------------------|----------|------|
| Input Voltage                        | V <sub>i</sub>   | -35      | V    |
| Thermal Resistance Junction-Air      | R <sub>θJA</sub> | 100      | °C/W |
| Thermal Resistance Junction-Case     | R <sub>θJC</sub> | 10       | °C/W |
| Operating Junction Temperature Range | T <sub>OPR</sub> | 0~+150   | °C   |
| Storage Temperature Range            | T <sub>STG</sub> | -55~+150 | °C   |


### ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE

(V<sub>i</sub>=-23V, I<sub>O</sub>=500mA, C<sub>i</sub>=2.2μF, C<sub>O</sub>=1μF, unless otherwise specified )

| Parameter                | Symbol              | Test conditions                                     | Min     | Typ    | Max   | Unit              |
|--------------------------|---------------------|---|---------|--------|-------|-------------------|
| Output voltage           | V <sub>O</sub>      | 25°C  | -14.4   | -15    | -15.6 | V                 |
|                          |                     | -17.5V≤V <sub>i</sub> ≤-30V, I <sub>O</sub> =5mA-1A | 0-125°C | -14.25 | -15   | -15.75            |
| Load regulation          | ΔV <sub>O</sub>     | I <sub>O</sub> =5mA-1.5A                            | 25°C    | 15     | 200   | mV                |
|                          |                     | I <sub>O</sub> =250mA-750mA                         | 25°C    | 5      | 75    | mV                |
| Line regulation          | ΔV <sub>O</sub>     | -17.5V≤V <sub>i</sub> ≤-30V                         | 25°C    | 5      | 100   | mV                |
|                          |                     | -20V≤V <sub>i</sub> ≤-26V                           | 25°C    | 3      | 50    | mV                |
| Quiescent current        | I <sub>Q</sub>      |   | 25°C    | 2      | 3     | mA                |
| Quiescent current change | ΔI <sub>Q</sub>     | -17.5V≤V <sub>i</sub> ≤-30V                         | 0-125°C |        | 0.5   | mA                |
|                          | ΔI <sub>Q</sub>     | 5mA≤I <sub>O</sub> ≤1A                              | 0-125°C |        | 0.5   | mA                |
| Output noise voltage     | V <sub>N</sub>      | 10Hz≤f≤100KHz                                       | 25°C    | 375    |       | μV/V <sub>O</sub> |
| Output voltage drift     | △V <sub>O</sub> /△T | I <sub>O</sub> =5mA                                 | 0-125°C |        | -1    | mV/°C             |
| Ripple rejection         | RR                  | -18.5V≤V <sub>i</sub> ≤-28.5V, f=120Hz              | 0-125°C | 54     | 60    | dB                |
| Dropout voltage          | V <sub>D</sub>      | I <sub>O</sub> =1A                                  | 25°C    |        | 1.1   | V                 |
| Peak current             | I <sub>PK</sub>     |   | 25°C    |        | 2.1   | A                 |
| Short circuit current    | I <sub>SC</sub>     | V <sub>i</sub> =-35V                                | 25°C    |        | 300   | mA                |

\* Pulse test.

### TYPICAL APPLICATION

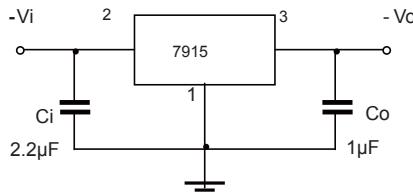

# RATINGS AND CHARACTERISTIC CURVES

## TYPICAL APPLICATION

