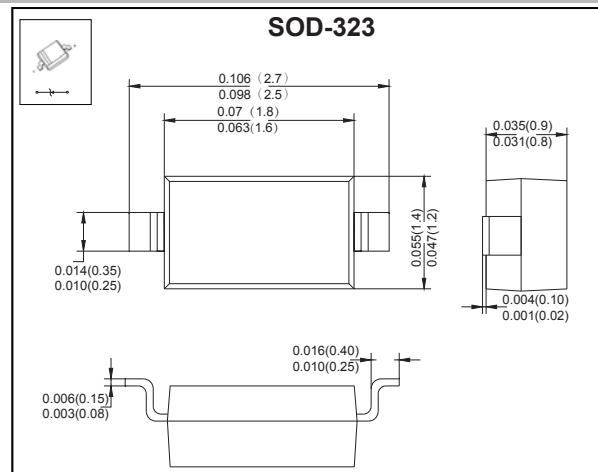


**SCHOTTKY BARRIER DIODE**
**VOLTAGE RANGE: 30V**
**PEAK PULSE POWER:200mW**
**FEATURES**

- Extremely Fast Switching Speed
- Low Forward Voltage

**MECHANICAL DATA**

- Case: SOD-323 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any


**MAXIMUM RATINGS AND CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified

Parameter	Symbol	Limit	Unit
Non-Repetitive Peak Reverse Voltage	$V_{RM}$	30	V
DC Blocking Voltage	$V_R$	21	V
Average Rectified Output Current	$I_O$	100	mA
Forward Continuous Current	$I_F$	200	mA
Repetitive Peak Forward Current	$I_{FRM}$	300	mA
Non-repetitive Peak Forward Surge Current @t=8.3ms	$I_{FSM}$	600	mA
Power Dissipation	$P_D$	200	mW
Thermal Resistance Junction to Ambient	$R_{\theta JA}$	500	°C/W
Junction Temperature	$T_J$	125	°C
Storage Temperature Range	$T_{STG}$	-55~+150	°C

**Electrical Specification (T<sub>A</sub>=25°C unless otherwise specified)**

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse breakdown voltage	$V_{(BR)}$	$I_R=100\mu A$	30			V
Forward voltage	$V_{F1}$	$I_F=0.1mA$			240	mV
	$V_{F2}$	$I_F=1.0mA$			320	mV
	$V_{F3}$	$I_F=10mA$			400	mV
	$V_{F4}$	$I_F=30mA$			500	mV
	$V_{F5}$	$I_F=100mA$			1000	mV
Reverse current	$I_R$	$V_R=25V$			2.0	uA
Reverse recovery time	$t_{rr}$	$I_F=10mA$ , $I_R=10mA$ to 1mA , $R_L=100\Omega$			5.0	ns
Capacitance between terminals	$C_T$	$V_R=1V, f=1MHz$			10	pF

**MARKING: L9**



# RATINGS AND CHARACTERISTIC CURVES

## Typical Characteristics

