



HFZT

DAN202

## Small Signal Switching Diodes


### FEATURES

- High Speed
- High Reliability
- Suitable for High Packing Density Layout

### MECHANICAL DATA

- Case: SOT-23 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

VOLTAGE RANGE: 80V  
PEAK PULSE POWER: 250mW

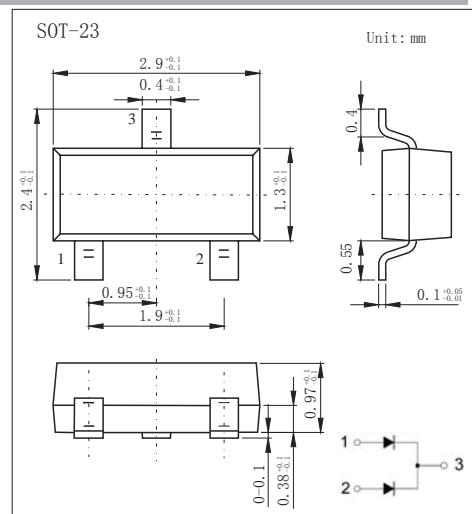

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_R$	DC Blocking Voltage	80	V
$I_o$	Continuous Forward Current	100	mA
$I_{FM}$	Peak Forward Current	300	mA
$I_{FSM}$	Non-repetitive Peak Forward Surge Current@t= 8.3ms	2	A
$P_D$	Power Dissipation	250	mW
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	500	°C/W
$T_j$	Junction Temperature	150	°C
$T_{stg}$	Storage Temperature	-55~+150	°C

### Electrical Specification ( $T_A=25$ @25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	$I_R=100\mu A$	80			V
Reverse current	$I_R$	$V_R=70V$			0.1	$\mu A$
Forward voltage	$V_F$	$I_F=100mA$			1.2	V
Total capacitance	$C_{tot}$	$V_R=6V, f=1MHz$			3.5	pF
Reverse recovery time	$t_{rr}$	$I_F= I_R=5mA, V_R=6V$			4	ns

### MARKING: N

## RATINGS AND CHARACTERISTIC CURVES

