

## TO-92 Plastic-Encapsulate Transistors


### FEATURES

- General Purpose Amplifier
- TRANSISTOR (PNP)

### MECHANICAL DATA

- Case style: TO-92 molded plastic
- Mounting position: any

### TO-92

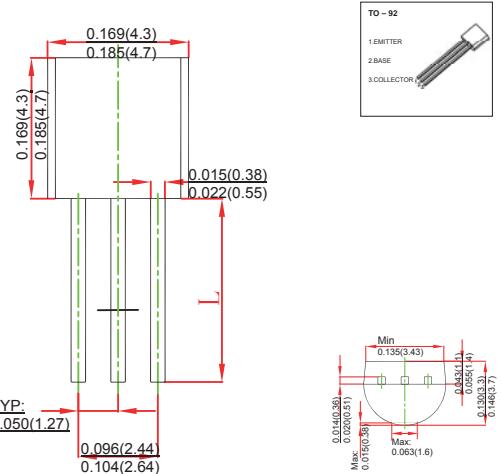

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Symbol	Parameter	Value	Unit
V <sub>CBO</sub>	Collector-Base Voltage	-60	V
V <sub>CEO</sub>	Collector-Emitter Voltage	-60	V
V <sub>EBO</sub>	Emitter-Base Voltage	-4	V
I <sub>C</sub>	Collector Current -Continuous	-0.5	A
P <sub>D</sub>	Collector Power Dissipation	625	mW
R <sub>θJA</sub>	Thermal Resistance from Junction to Ambient	200	°C /W
T <sub>j</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55 ~ +150	°C








### ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
MPSA55	TO-92	Bulk	1000pcs/Bag
MPSA55-TA	TO-92	Tape	2000pcs/Box


Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -0.1mA, I <sub>E</sub> =0	-60			V
Collector-emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = -1mA, I <sub>B</sub> =0	-60			V
Emitter-base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = -0.1mA, I <sub>C</sub> =0	-4			V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> = -60V, I <sub>E</sub> =0			-0.1	KA
Collector cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> = -60V, I <sub>B</sub> =0			-0.1	KA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> = -4V, I <sub>C</sub> =0			-0.1	KA
DC current gain	h <sub>FE(1)</sub>	V <sub>CE</sub> = -1V, I <sub>C</sub> = -10mA	100			
	h <sub>FE(2)</sub>	V <sub>CE</sub> = -1V, I <sub>C</sub> = -100mA	100			
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = -100mA, I <sub>B</sub> = -10mA			-0.25	V
Base-emitter on voltage	V <sub>BE</sub>	I <sub>C</sub> = -100mA, V <sub>CE</sub> = -1V			-1.2	V
Transition frequency	f <sub>T</sub>	V <sub>CE</sub> = -1V, I <sub>C</sub> = -100mA, f=100MHz	50			MHz

Marking	MPSA55
---------	--------

## Typical Characteristics

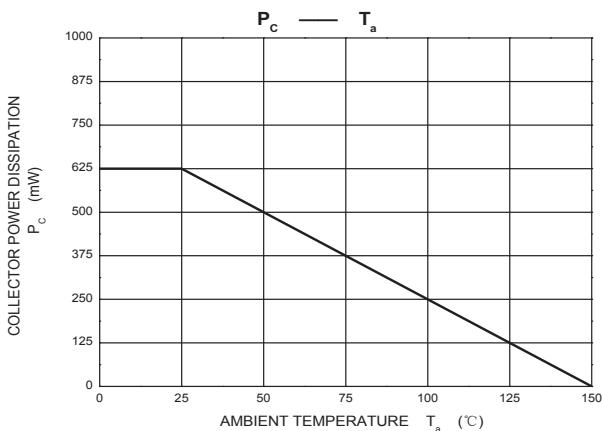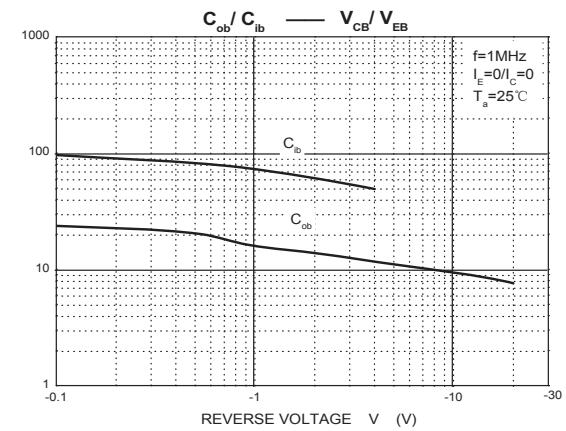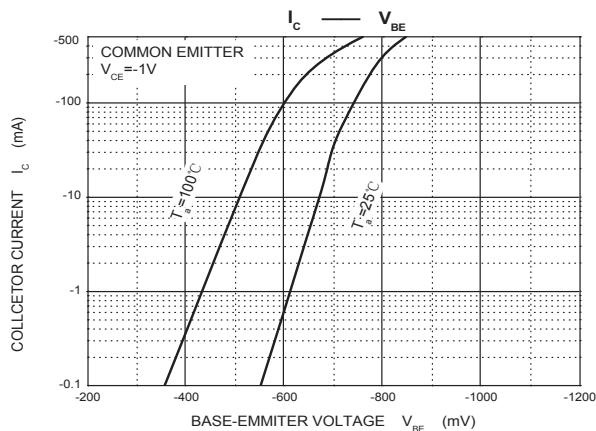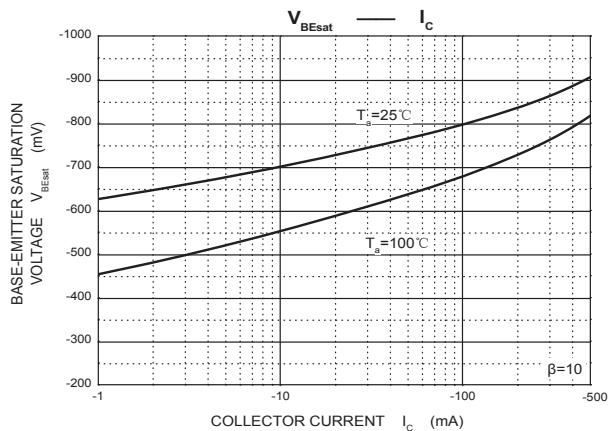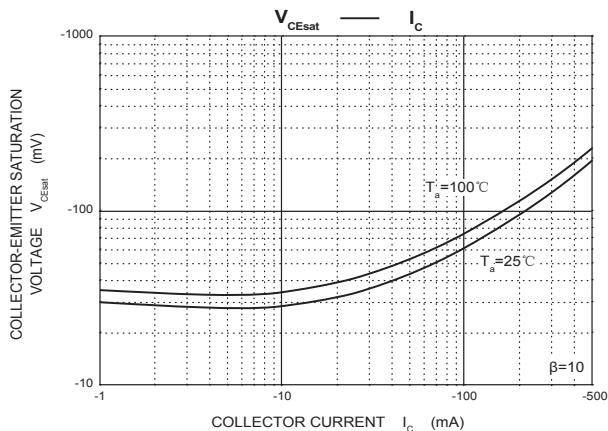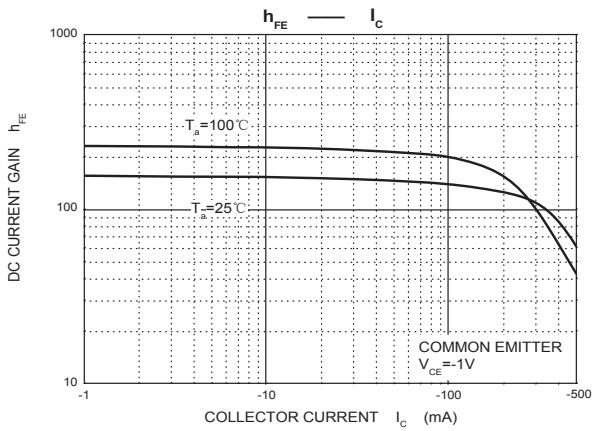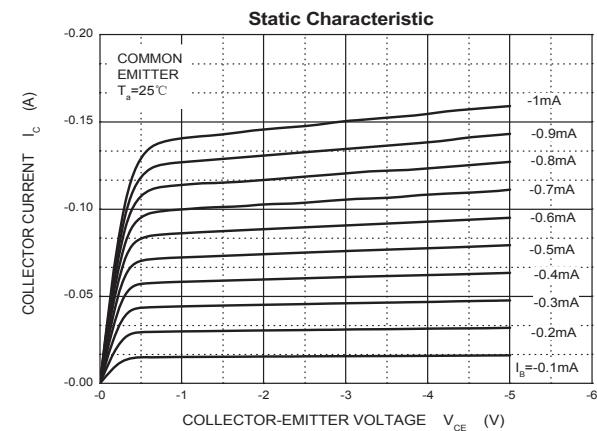


**TO-92 PACKAGE TAPEING DIMENSION**

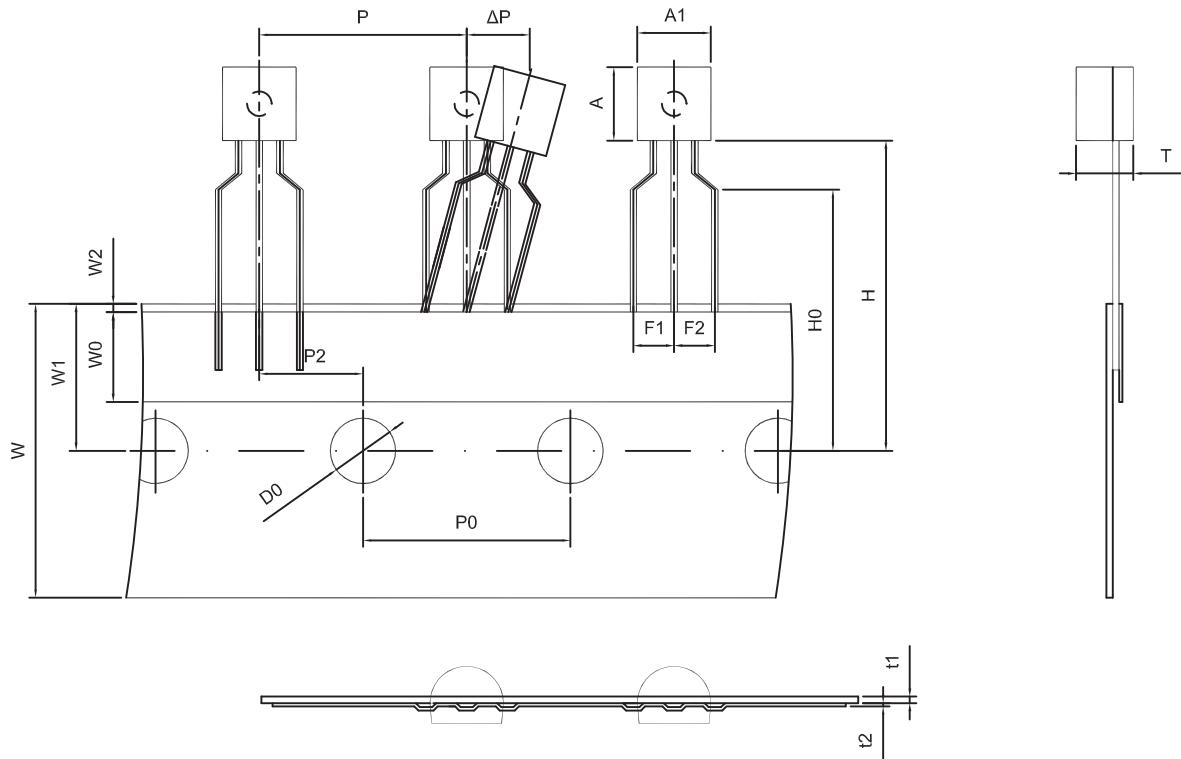

Dimensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

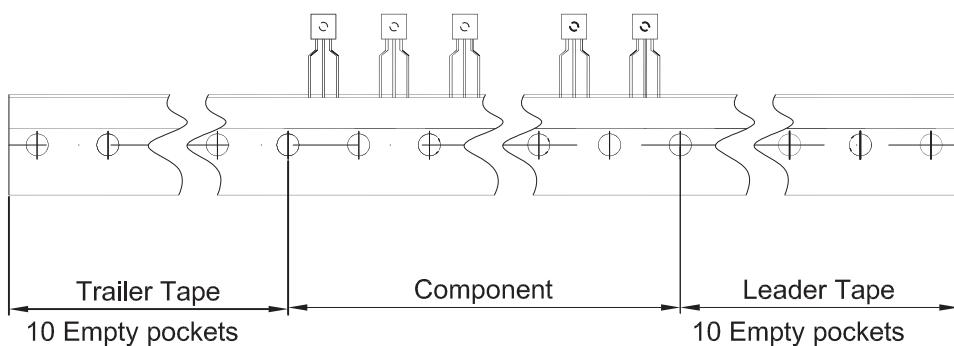

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250