

## Schottky Barrier Diode


**VOLTAGE RANGE: 40V**
**PEAK PULSE POWER:200mW**

### FEATURES

- Low current rectifier schottky diode
- Low voltage, low inductance
- For power supply

### MECHANICAL DATA

- Case: SOD-323 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

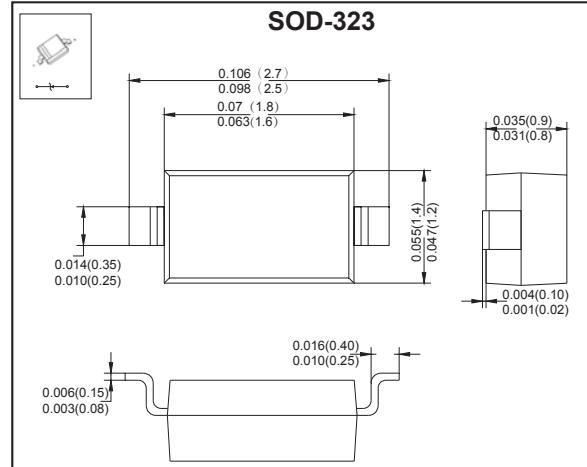

## MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

Parameter	Symbol	Limit		Unit
Peak reverse voltage	V <sub>RM</sub>	40		V
DC reverse voltage	V <sub>R</sub>	30		V
Mean rectifying current	I <sub>O</sub>	0.03		A
Non-repetitive Peak Forward Surge Current@t=8.3ms	I <sub>FSM</sub>	0.2		A
Power dissipation	P <sub>D</sub>	200		mW
Thermal Resistance Junction to Ambient	R <sub>θJA</sub>	500		°C/W
Junction temperature	T <sub>j</sub>	125		°C
Storage temperature	T <sub>stg</sub>	-55~+150		°C

## Electrical Specification (T<sub>A</sub>=25@25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Forward voltage	V <sub>F</sub>		0.37		V	I <sub>F</sub> =1mA
Reverse current	I <sub>R</sub>		0.5		μ A	V <sub>R</sub> =30V
Capacitance between terminals	C <sub>T</sub>		2	pF		V <sub>R</sub> =1V, f=1MHZ

**MAKING: 5**

# RATINGS AND CHARACTERISTIC CURVES

## Typical Characteristics

