



# SR520 --- SR5200

## SCHOTTKY BARRIER RECTIFIER

VOLTAGE RANGE: 20--- 200 V CURRENT: 5.0 A


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing
- Low power loss,high efficiency
- High current capability,Low forward voltage drop
- High surge capability
- For use in low voltage,high frequency inverters free wheeling, and polarity protection applications
- High temperature soldering guaranteed:260°C/10 seconds at terminals
- Component in accordance to RoHS 2011/65/EU

### MECHANICAL DATA

- Case:DO-27 molded plastic body
- Terminals:Lead solderable per MIL-STD-750,method 2026
- Polarity:Color band denotes cathode end
- Mounting Position:Any

### DO-27

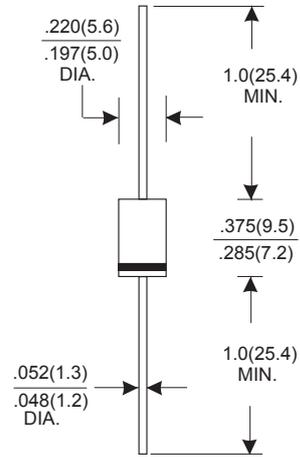

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)Single phase,half wave,60 Hz,resistive or inductive load.

For capacitive load,derate by 20%.

| TYPE NUMBER   | SYMBOL              | SR 520          | SR 530 | SR 540 | SR 550 | SR 560 | SR 580 | SR 5100 | SR 5200 | UNITS |
|---|---------------------|-----------------|--------|--------|--------|--------|--------|---------|---------|-------|
| Maximum recurrent peak reverse voltage  | $V_{RRM}$           | 20              | 30     | 40     | 50     | 60     | 80     | 100     | 200     | V     |
| Maximum RMS voltage   | $V_{RMS}$           | 14              | 21     | 28     | 35     | 42     | 57     | 71      | 140     | V     |
| Maximum DC blocking voltage   | $V_{DC}$            | 20              | 30     | 40     | 50     | 60     | 80     | 100     | 200     | V     |
| Maximum Average Forward rectified Current<br>0.375"(9.5mm) lead length            | $I_{F(AV)}$         | 5.0             |        |        |        |        |        |         |         | A     |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load | $I_{FSM}$           | 150.0           |        |        |        |        |        |         |         | A     |
| Maximum instantaneous forward voltage at 5.0 A (Note 1)                           | $V_F$               | 0.55            |        | 0.70   |        | 0.85   |        | 0.90    |         | V     |
| Maximum reverse current at rated DC blocking voltage per diode                    | @ $T_A=25^\circ C$  | 0.5             |        |        |        |        |        |         |         | mA    |
|   | @ $T_A=125^\circ C$ | 50.0            |        |        |        | 25.0   |        |         |         |       |
| Typical Thermal Resistance (Note 2)   | $R_{\theta JA}$     | 25              |        |        |        |        |        |         |         | °C/W  |
| Typical junction capacitance (Note 3)   | $C_j$               | 500.0           |        |        |        | 400.0  |        |         |         | pF    |
| Storage Temperature   | $T_{STG}$           | - 55 ---- + 150 |        |        |        |        |        |         |         | °C    |
| Operation Junction Temperature  | $T_j$               | - 55 ---- + 120 |        |        |        |        |        |         |         | °C    |

NOTE: 1. Pulse test:300µs pulse width,1% duty cycle.


2.Thermal resistance from junction to lead vertical P.C.B. Mounted,0.375"(9.5mm) lead length

3.Measured at 1MHz and reverse voltage of 4.0 volts




# RATINGS AND CHARACTERISTIC CURVES


**FIG.1-FORWARD CURRENT DERATING CURVE**

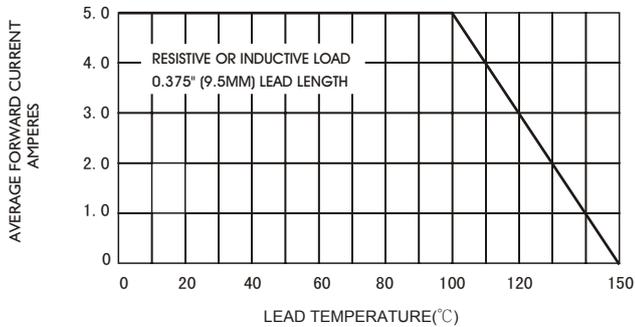


**FIG.2-MAXIMUM NON-REPETITIVE PEAK**

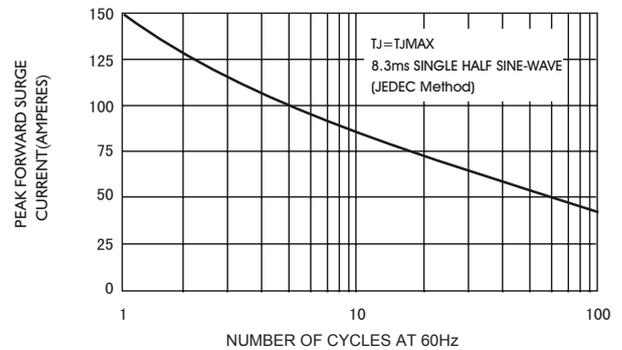


**FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

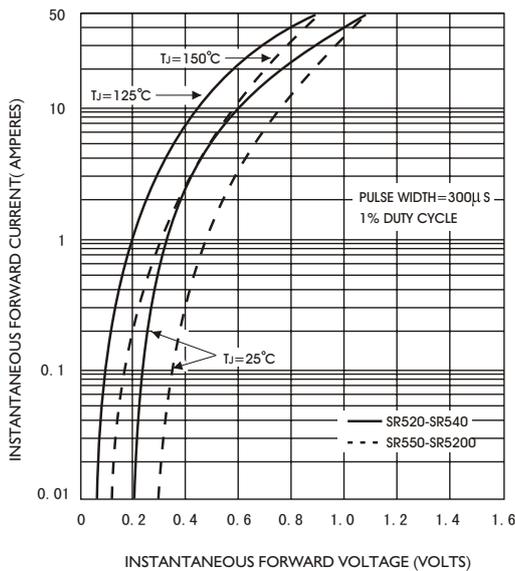

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

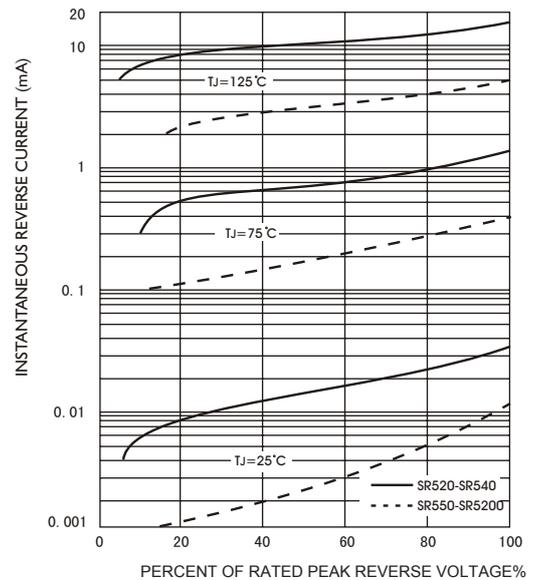

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

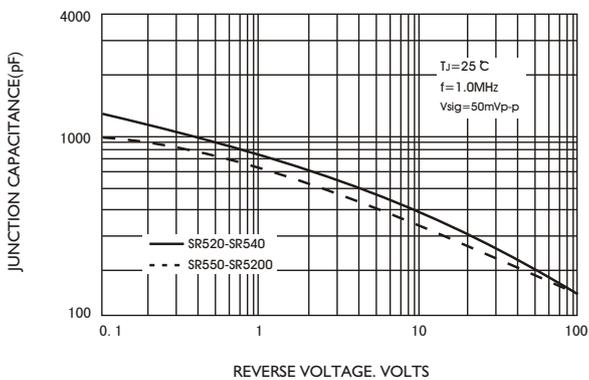

**FIG.6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

