



HFZT

SS22---SS220

SCHOTTKY BARRIER RECTIFIER

FEATURES


- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing
- For surface mounted applications
- Metal silicon junction,majority carrier conduction
- Low power loss,high efficiency
- Built-in strain relief,ideal for automated placement
- High forward surge current capability
- High temperature soldering guaranteed:260 °C/10 seconds at terminals
- Component in accordance to RoHS 2002/95/Ec and WEEE 2002/96/EC

MECHANICAL DATA

- Case: SMA molded plastic body
- Polarity:Color band denotes cathode end
- Mounting Position:Any

VOLTAGE RANGE: 20--- 200 V CURRENT: 2.0 A

SMA

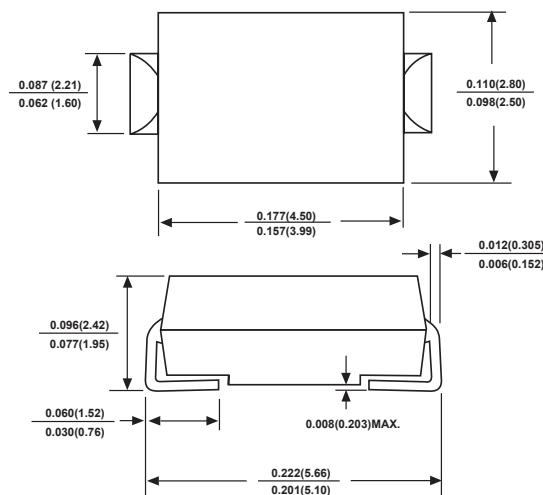

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted) Single phase,half wave,60 Hz,resistive or inductive load.

For capacitive load,derate by 20%.

TYPE NUMBER	SYMBOL	SS22	SS23	SS24	SS25	SS26	SS28	SS210	SS215	SS220	UNITS				
Maximum recurrent peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V				
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V				
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	150	200	V				
Maximum Average Forward rectified Current lead length	I _{F(AV)}	2.0									A				
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50.0									A				
Maximum instantaneous forward voltage at 2.0 A	V _F	0.45	0.55	0.70	0.85						V				
Maximum reverse current @T _A =25°C at rated DC blocking voltage per diode	I _R	0.5				0.1					mA				
@T _A =100°C		20.0													
Typical Thermal Resistance (Note 2)	R _{θJA}	88.0									°C/W				
Typical junction capacitance (Note 1)	C _j	250									pF				
Storage Temperature	T _{STG}	- 65 ---- + 150									°C				
Operation Junction Temperature	T _j	- 65 ---- + 125									°C				

NOTE:

1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas



HFZT

RATINGS AND CHARACTERISTIC CURVES

FIG. 1- FORWARD CURRENT DERATING CURVE

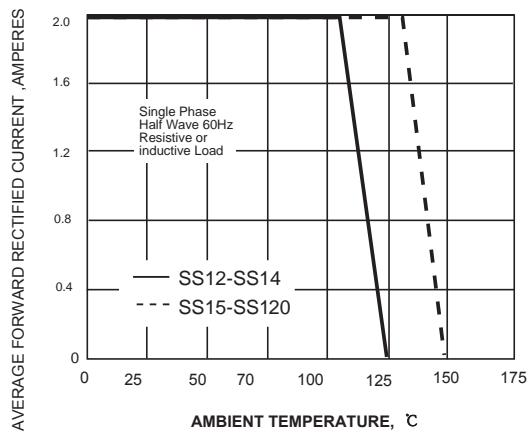


FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

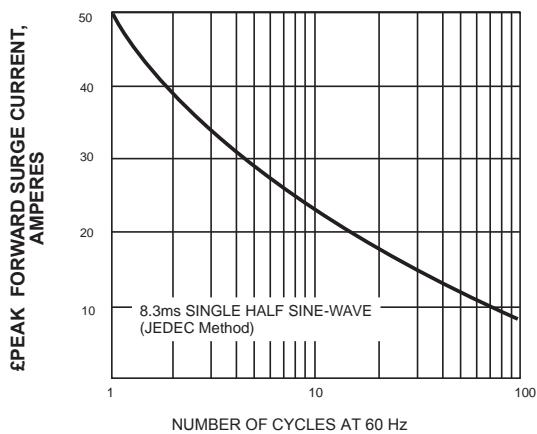


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

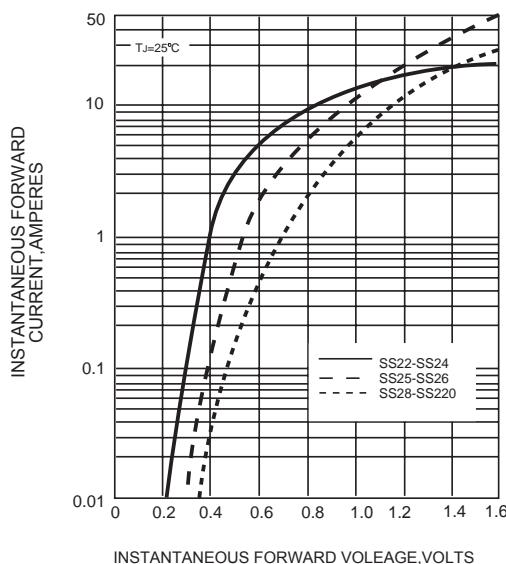


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

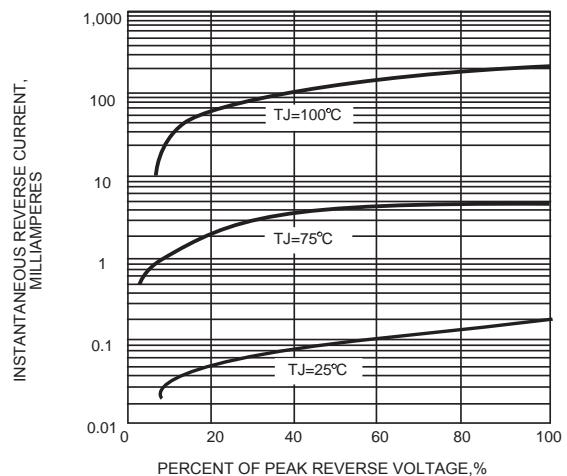


FIG. 5-TYPICAL JUNCTION CAPACITANCE

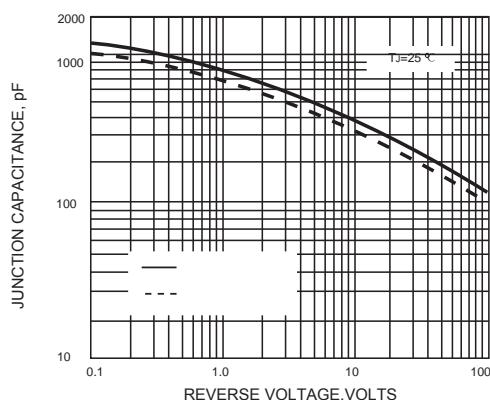


FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE

